

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 404 043 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
31.03.2004 Bulletin 2004/14

(51) Int Cl.7: **H04J 3/06**, H04L 12/28,
H04Q 9/04, G08C 17/00,
H04L 12/56

(21) Application number: **02079058.0**

(22) Date of filing: **26.09.2002**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

• **Nielsen, Martin Sandal**
6830 Norre-Nebel (DK)

(71) Applicant: **VKR Holding A/S**
2860 Soeborg (DK)


(74) Representative: **Elmeros, Claus**
Patentgruppen ApS,
Arosgaarden,
Aaboulevarden 31
8000 Aarhus C (DK)

(72) Inventors:
• **Sorensen, Henning**
6940 Lem St. (DK)

(54) **Method of controlling operation of at least one transmitter and/or one receiver, communication system and use of such a method or such a system**

(57) Method of and communication system for controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interro-

gation signals etc. wherein a signal comprising a message frame transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.

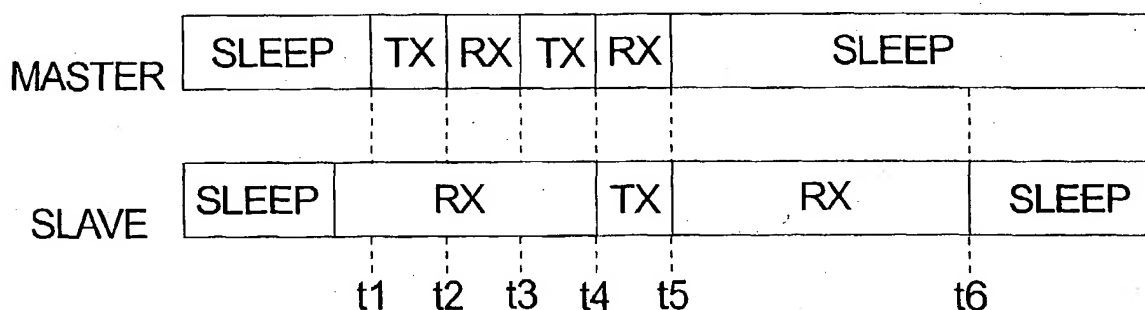*Fig. 2*

EP 1 404 043 A1

Description

Field of the invention

[0001] The invention relates to a method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc.

[0002] The invention also relates to a communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc.

[0003] Further, the invention relates to uses of the method and/or the system according to the invention.

Background of the invention

[0004] In systems wherein one- or two-way communication is performed between nodes, e.g. units, apparatus, etc. by means of wireless transmission, for example radio frequency transmission, it is of importance that a node, e.g. an apparatus, will be able to receive a transmitted signal, e.g. a message, a dataframe etc. where such a signal has been transmitted from e.g. another node in the system. Normally, this is achieved by letting the node in question be in a receive mode constantly, e.g. by having all necessary circuits and in particular the radio frequency circuits be active continuously. This will of course contribute significantly to the total power consumption of the node in question.

[0005] Therefore, there is a need to design and/or operate such systems and nodes utilized in such systems in a manner, whereby power consumption is reduced. This need is enhanced owing to the fact that many of the nodes involved in such systems rely on power supply systems where maximum power, rating and/or capacity are limited, such as battery power supply.

[0006] Further, the need to be able to establish a communication to or between nodes without time delay or without an unacceptable time delay, e.g. unacceptable in the specific circumstances, must be kept in mind when designing such systems and/or methods for operation.

[0007] Thus, it is an objective of the invention to provide a method of controlling operation of at least one transmitter and/or one receiver in a communication system as specified above, by means of which communication between at least two nodes, e.g. one and/or two-way communication, in a system may be performed in a manner providing reduction in power consumption.

[0008] Further, it is an objective of the present invention to provide a communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc. which allows communication to be performed in a power saving manner.

[0009] It is also an objective of the invention to provide

such a method and such a system for transmission of signals as specified above, by means of communication may be established reliably and without unacceptable time delay.

[0010] It is a further objective to provide such a method and a system by means of which it will be possible to lower power consumption remarkably in relation to normal mode operation and in relation to prior art power saving systems.

[0011] A further objective of the invention is to present advantageous uses for such a method and/or such a system.

[0012] These and other objectives are achieved by the invention as explained in the following.

Summary of the invention

[0013] In the following a number of operating modes will be referred to when describing and claiming the invention. To clarify these matters, these modes will be briefly mentioned here.

[0014] A transmitter may operate in two modes, namely a normal active mode, e.g. transmitting or prepared to transmit, and a sleep mode, in which some parts of the transmitter and in particular the radio frequency circuit(s) or part hereof is - more or less - deactivated.

[0015] A receiver may operate in two modes, namely a normal active mode, e.g. receiving or prepared to receive, and a sleep mode, in which some parts of the receiver and in particular the radio frequency circuit(s) or part hereof is - more or less - deactivated.

[0016] A transceiver may similarly operate in two modes, namely a normal active operating mode, e.g. transmitting/receiving or prepared to transmit or receive, and a sleep mode, in which some parts of the transceiver and in particular the radio frequency circuit(s) or part hereof is - more or less - deactivated.

[0017] Accordingly, a system comprising at least a transmitter and a receiver may be in a normal operating mode, wherein the least one transmitter and the at least one receiver are in normal active mode constantly.

[0018] Further, such a system may be in a power saving mode, wherein the transmitter and/or the receiver (and/or a transceiver, if comprised in the system) may be in a sleep mode for a period of time. The invention relates to systems and methods having such features. A particular embodiment of such a system will be referred to in the following as a long preamble mode system, e.g. operating in accordance with a long preamble mode, while another particular embodiment will be referred to as time controlled poll mode system, e.g. operating in accordance with a time controlled poll mode.

[0019] The invention relates to a method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein a signal comprising a message frame

transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.

[0020] Hereby, it is achieved that one or both of the nodes involved, e.g. a master and a slave node may enter a sleep mode and still be able to engage in scheduled communication again. Thus, predetermined or pre-scheduled communication may be performed in a reliable manner providing several possibilities of lowering power consumption for one or both of the nodes involved. Obviously, such a method may be performed using two-way communication as well as one-way communication.

[0021] Preferably, as specified in claim 2, said message part indicative of the time of transmission for a later signal, e.g. a later dataframe, may relate to the time of transmission for a following signal to be transmitted to said receiver. Hereby, the slave node may be able to enter sleep mode and remain in this mode for the whole period, whereby optimal power reduction may be achieved. However, it will be understood that - if found advantageous - the slave may be active in the time period in question, e.g. between the prescheduled transmissions, for example in accordance with another predetermined receive pattern.

[0022] Advantageously, as specified in claim 3, said message part indicative of the time of transmission may relate to a period of time following the signal in question. Hereby the slave node as well as the master node may determine the next time of transmission by measuring the lapsed time from the time, the message was received.

[0023] In a preferred embodiment, as specified in claim 4, said message part indicative of the time of transmission may relate to a point of time relating to a timing reference, e.g. a timing reference established at each node or at least at one of the nodes involved. Hereby, the next time of transmission may be determined in a simple manner, e.g. by using the commonly available timing means normally comprised in the nodes in question. It may be noted that the timing means may be synchronized regularly, e.g. every time a message is transmitted from a master to a slave, the timing reference of the master may be included in the message and the slave node may adjust its own timing reference, if necessary.

[0024] Advantageously, as specified in claim 5, said transmitter may be brought into a special mode, e.g. a sleep mode, a power conserving mode, after having concluded transmission of said signal, preferably after receipt of a confirmation signal from said receiver. Hereby, a significant power saving may be achieved on the part of the transmitter, e.g. the master node. Obviously, a power saving may also be achieved in relation to a long preamble mode, in which the transmitter is programmed to transmit a preamble of a considerable length, e.g. 500 msec, every time a message has to be transmitted. In essence, the power consumption neces-

sary for transmitting such a long preamble may thus be avoided, since according to the invention a preamble of only a relatively small length need to be transmitted.

[0025] Preferably, as specified in claim 6, said transmitter may be controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part. Hereby, the master may be in a sleep mode for essentially the whole period between transmitted messages.

[0026] In a further preferred embodiment, as specified in claim 7, said receiver may be brought into a special mode, e.g. a sleep mode, a power conserving mode, after having received said signal, preferably after having transmitted a confirmation signal and possibly after a further retransmission time. Hereby, a significant power saving may be achieved on the part of the receiver, e.g. the slave node. Obviously, a power saving may also be achieved in relation to a long preamble mode, in which the receiver is programmed to be active in a receive slot, e.g. for 10 msec, during every period corresponding to a long preamble, e.g. 500 msec. Thus, in the long preamble mode, the receiver has to be active for at least 10/500 of the time. However, in the time control poll mode, the active time and thus also the power consumption may be reduced by e.g. a factor 1000, all depending on the actual use and transmit/receive pattern in question.

[0027] Advantageously, as specified in claim 8, said receiver may be controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part. Hereby, the slave may be in a sleep mode for essentially the whole period between transmitted messages.

[0028] In a still further preferred embodiment, as specified in claim 9, said method may comprise steps of resuming synchronization, e.g. in case said receiver has not received said time indicative message part or in case said transmitter has not received confirmation from said receiver of receipt of said time indicative message part. Hereby, a reliable communication method is established.

[0029] Advantageously, as specified in claim 10, said steps of resuming synchronization may comprise the step of altering the operating mode of the transmitter until a communication has been established with the receiver, where after normal operating mode may be resumed. Hereby, for example by altering the operation mode of the master node to a long preamble mode, synchronicity may be regained effectively and relatively quickly, thereby minimizing the error time.

[0030] Preferably, as specified in claim 11, said steps of resuming synchronization may comprise the step of altering the operating mode of the receiver until a communication has been established with the transmitter, where after normal operating mode may be resumed. Advantageously, the receiver may alter its operation mode to a long preamble mode.

[0031] In an advantageous embodiment, as specified

in claim 12, said special mode of said transmitter and/or said receiver may comprise a sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively. It will be understood, though, that other parts than the radio frequency parts may be brought into sleep mode, e.g. parts not necessary for the timing and for the reactivation.

[0032] Advantageously, as specified in claim 13, said at least one transmitter and/or at least one receiver may each form part of a node comprising a transceiver arrangement. Although the invention may relate to a system comprising nodes performing by one-way communication, it will be understood that master as well as slave nodes may comprise transceiver arrangements, which also will be apparent from the specific examples given in the detailed description.

[0033] Further, as specified in claim 14, said communication system may comprise at least two nodes, each comprising at least a transmitter and/or a receiver for wireless transmission, e.g. radio frequency transmission. It will be understood that other means of transmission than radio frequency may be utilized. Further, it will be understood that the invention may be utilized in connection with systems comprising a plurality of master and/or slave nodes.

[0034] The invention also relates to a communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals; request signals, interrogation signals etc. wherein said at least one transmitter is designed to be able to include a message part indicative of the time of transmission for a later signal when transmitting a signal to said at least one receiver.

[0035] Hereby, it is achieved that one or both of the nodes involved, e.g. a master and a slave node may enter a sleep mode and still be able to engage in scheduled communication again. Thus, predetermined or pre-scheduled communication may be performed in a reliable manner providing several possibilities of lowering power consumption for one or both of the nodes involved. Obviously, such a system may operate using two-way communication as well as one-way communication.

[0036] When, as specified in claim 16, said at least one transmitter and/or one receiver comprise timing means, the message part indicative of the time of transmission for a later signal may be made readily available to the transmitter and said message part may be readily utilized by the receiver for operative purposes. Hereby, the next time of transmission may be determined in a simple manner, e.g. by using the commonly available timing means normally comprised in the nodes in question. It may be noted that the timing means may be synchronized regularly, e.g. every time a message is transmitted from a master to a slave, the timing reference of the master may be included in the message and the slave node may adjust its own timing reference, if nec-

essary.

[0037] In an advantageous embodiment, as specified in claim 17, said at least one receiver may comprise control means for switching between at least two modes of operation in dependence on a received message part indicative of the time of transmission for a later signal. Hereby the altering of the operative modes may be achieved in a relatively simple manner.

[0038] In a further advantageous embodiment, as specified in claim 18, said at least one transmitter may comprise control means for switching between at least two modes of operation in dependence on a transmitted message part indicative of the time of transmission for a later signal. Hereby the altering of the operative modes may be achieved in a relatively simple manner.

[0039] Preferably, as specified in claim 19, said at least two modes of operation may comprise a normal operating mode and a sleep mode, e.g. a power-conserving mode. It will be understood, though, that other modes maybe involved and that more than two modes may be selectable.

[0040] In a still further advantageous embodiment, as specified in claim 20, said sleep mode, e.g. a power conserving mode of said transmitter and/or said receiver may comprise sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively. It will be understood, though, that other parts than the radio frequency parts may be brought into sleep mode, e.g. parts not necessary for the timing and for the reactivation.

[0041] When, as specified in claim 21, said at least one transmitter and/or said at least one receiver comprises battery power supply means, a particular advantageous embodiment has been achieved, since the resulting low power consumption of the transmitter and/or receiver will provide a prolonged operative life of the power supply, thereby giving enhanced reliability and user-friendliness. Other supply systems may profit as well, though, when the invention is utilized, e.g. solar power operated systems.

[0042] In a particular advantageous embodiment, as specified in claim 22, said at least one transmitter and/or said at least one receiver may comprise means, e.g. control means for determining a lack of synchronicity and means for initiating a synchronization resumption process. Hereby the system may quickly take measures to regain synchronicity, whereby a reliable communication may be maintained.

[0043] Advantageously, as specified in claim 23, said system may be designed to operate in accordance with a method according to one or more of claims 1 - 14.

[0044] Finally, the invention pertains to a use of a method according to one or more of claims 1 - 14 and/or a system according to one or more of claims 15 - 23 for updating of measures values in e.g. control, request and/or interrogation systems.

[0045] It will be understood that the invention is of par-

particular importance when dealing with systems where very frequent communication is not necessary and where fast updating of e.g. measured values, control signals, interrogation etc. is not necessary.

The figures

[0046] The invention will be explained in further detail below with reference to the figures of which

- fig. 1 shows a general overview of a system according to an embodiment of the invention,
- fig. 2 is a functional diagram illustrating the communication between a master and a slave node as well as the function of these nodes according to an embodiment of the invention,
- fig. 3 shows a functional diagram corresponding to fig. 2, but in a different operational situation,
- fig. 4 shows a functional diagram corresponding to fig. 2, but in a modified embodiment,
- fig. 5 is a functional diagram illustrating a method of regaining synchronicity according to an embodiment of the invention, and
- fig. 6 is a functional diagram corresponding to fig. 5, but illustrating another operational situation.

Detailed description

[0047] Fig. 1 shows a general overview of a system according to an embodiment of the invention. The system comprises a plurality of nodes or units 2, 4, 6, 8, 10, 12, 14 (N1 - Nn). Some or even all of these may comprise or be linked to devices, for example sensors, drive units for various apparatus and means, etc 20, 22, 24, 26. Such drive units may for example be activators of various types and may be used in a wide variety of applications, as explained in further detail later on.

[0048] The units N1 - Nn may also or instead comprise or be linked to assorted apparatus, measuring devices, indicating devices, controllers etc. that need to receive information, control signals etc. at certain points of time. A common feature of the units 2, 4, 6, 8, 10, 12 is that it is necessary or advantageous to be able to send some sort of information, signal etc. to the units. Further, it may be necessary or preferable to be able to receive information or signals from the units, e.g. confirmation signals, acknowledgement signals, measurement signals etc.

[0049] In the embodiment shown in fig. 1, the nodes or units 4, 6, 12, 14 are equipped with receiving means for radio frequency signals, e.g. including antenna means. Each of these nodes or units may comprise e.g. measuring means, sensors, one or more motor drive units or control units and may be connected to a driven or controlled member etc. It will be understood that these means may be integrated with the unit. It will further be understood that a system may comprise one or more of these nodes or units and that these may be sim-

ilar or dissimilar and may control one or more similar or different devices. The nodes or units N2, N3, N6 - Nn will also be referred to as controllable units or slave units in the following.

[0050] The system further comprises one or more nodes or units, e.g. 2, 8, 10 (N1, N4, N5) designed for transmission of signals by means of radio frequency transmission means or other types of wireless transmission. These nodes or units may be used for transmitting control signals or other types of signals to one or more of the other nodes or units in the system.

[0051] The nodes N1, N4, N5, which may be remote controls, will also be referred to as controllers or master units in the following.

[0052] The method of performing a communication between the units or nodes comprised in the illustrated system, e.g. between a master node, e.g. the node 2 (N1), and one or more of the other nodes or units N2 - Nn, which may be described as slave units in the following, will now be described in further detail. It will be understood that in this context a master unit will imply a unit or a node in a communication system that initiates a transmission of data, and that a slave unit correspondingly will imply a unit that receives and possibly responds to a transmission from a master unit. Thus, any of the units involved in the system illustrated in fig. 1 may in principle take the role as a master unit as well as a slave unit in accordance with this definition. Further, it should be understood that the slave units will be able to respond to the received signals, e.g. by transmitting a response signal.

[0053] The transmission of signals, e.g. data between the nodes or units involved will take the form of a transmission of messages comprising a number of frames, packages or the like that are being transmitted between the units, e.g. a first frame from a first unit to a second unit, a second frame from the second unit to the first unit etc. A frame or a package comprises a number of bits that are transmitted consecutively. Each of the frames comprises a preamble part and a payload data part.

[0054] The operation of the nodes, e.g. the communication between these nodes and the operative modes of these nodes, e.g. normal active operating mode, sleep mode, and the operative modes of the system, e.g. normal active operating mode, a power saving mode such as time controlled poll mode, long preamble mode etc. will be described in the following with reference to figures 2 - 4.

[0055] A node that initiates a transmission will be referred to as a master node or simply a master. A node that responds to received signal from a master, or a node that will only transmit upon request from master, will be referred to as a slave in the following.

[0056] In fig. 2 the functionality of a system comprising a master and a slave unit that are operating according to an embodiment of the invention, also referred to as time controlled poll mode, are illustrated. Prior to the time t_1 , both are in a sleep mode, e.g. a mode wherein

power consumption has been reduced in relation to the power consumption in a normal, fully operative mode. This may be achieved by deactivating circuits that need not be operable when no transmission needs to be performed or when no reception of signals is expected, such as radio frequency (RF) circuits. However, it will be understood that some parts or circuits, such as some control circuits, need to be operable at all time in order to be able to "wake up" a node. The selection of circuits or circuits parts to be deactivated will of course depend on the specific circumstances and the design of the node, apparatus and/or transmitter/receiver means in question.

[0057] At the time t_1 , which has been indicated or specified by the master node to the slave node previously, the master node and the slave node will switch from sleep mode to a fully operable mode. As indicated, the slave node may initiate its transition from the sleep mode earlier than the master node in order to be able to receive a message transmitted immediately after the time t_1 from the master node. At the time t_1 the master unit transmits a data frame in a transmit interval TX. This data frame comprises, apart from a preamble and a message content relating to an ordinary command etc. destined for the slave node a message part indicating a later transmittal or preferably the next time, a signal or a polling will be transmitted to the slave node. This message part indicative of the next transmission time for a polling may for example be the absolute time for the transmission, measured in relation to a common time scale, or it may be a value indicating the time that will lapse before transmission is resumed. However, other means of indicating the later time of transmission may be utilized. For example, the later time of transmission may be provided by means of an algorithm known to at least the slave node, but preferably known to both the master node and the slave node. The master node may transmit a message, a sign, a character or the like, on the basis of which the slave node may calculate the later time of transmission, using the algorithm.

[0058] At the time t_1 , the slave node is in a receive mode (RX), however, in the example illustrated in fig. 2, the data frame transmitted by the master is not received by the slave. The master, which after the transmission has switched to a receive mode (RX) at the time t_2 , will therefore not receive the expected confirmation signal from the slave. After a predetermined time, the master switches to a transmit mode (TX) again at the time t_3 and retransmits the data frame. At the time t_4 the master switches to a receive mode (RX) and the slave, which this time has received the data frame, will transmit a confirmation signal. It will be understood that this pattern of repeated transmit- and receive-modes for the master may be repeated a predetermined number of times e.g. two or more than two. For practical reasons, however, the number of repetitions will be limited.

[0059] In the example shown in fig. 2, the master has received the confirmation signal from the slave node,

and at the time t_5 the master node will switch to sleep mode, e.g. by deactivating the radio frequency circuit(s) and possibly other circuits and circuit parts. The slave node will however remain in an active mode until the time t_6 , corresponding to the predetermined number of repeated transmissions, since the slave node does not receive a confirmation from the master node. The slave node may therefore in the illustrated example stay active in case the master unit has not received the confirmation signal sent from the slave node at time t_4 , waiting for possible retransmission(s) from the master node. At the time t_6 the slave node is brought into sleep mode, e.g. by deactivating the radio frequency circuit(s) and possibly other circuits and circuit parts.

[0060] The master node and the slave node will both be controlled to wake up in accordance with the message part indicative of the next transmittal, and the cycle described above will be repeated.

[0061] It will be understood that both master and the slave will have control means to perform the time control and to perform the activation of the deactivated parts. These control means may of course also involve timing means, e.g. clock means etc. whereby the point of time for reactivation may be provided readily if the time for the next transmission has been indicated by a point in time or by a time period. The control means may also be involved if for instance the reactivation time has to be calculated using an algorithm.

[0062] The operative cycle illustrated in fig. 3 corresponds to fig. 2, but in fig. 3 a case is shown, where the confirmation signal sent from the slave node at the time t_2 is not received by the master node. The master node will thus in accordance with this embodiment of the invention perform a retransmittal of the signal at the time t_3 . This signal is received by the slave node (again), and at the time t_4 the slave node has switched to transmit mode (TX) and transmits a confirmation signal again. This is received by the master node, which consequently, as explained above, is brought into sleep mode at the time t_5 . The slave node will as explained above wait until the time t_6 before going into sleep mode.

[0063] It will be understood that power consumption on the part of the slave node may be reduced further by reducing the time wherein the slave is active waiting for possible retransmissions, e.g. the period from the time t_2 to the time t_6 , or rather the period from a successful receipt of a signal from a master node and a transmittal of a confirmation signal until the time t_6 .

[0064] In a modified embodiment of the invention, the slave node is controlled to initiate the sleep mode, when a signal from a master node has been received and a confirmation signal has been transmitted. Since the signal from the master node has been successfully received, e.g. the content of the data frame has been received correctly, by the slave node, it is to be expected that the return confirmation signal will also be received by the master node. Thus, such a modified embodiment will perform with substantially the same or only a slightly

lower degree of success than the first embodiment and will have a further enhanced power reduction.

[0065] Another modified embodiment also having lower power consumption than the embodiment illustrated in fig. 2 and 3, but with a higher degree of efficiency than the above-described modified embodiment is illustrated in fig. 4.

[0066] In this embodiment the slave node is controlled in order to wait a number of receive slots, for example one, two etc. after having transmitted a confirmation signal before going into sleep mode.

[0067] As exemplified in fig. 4, after master and slave node have been activated at the previously indicated time t_1 , the master node has transmitted a signal, which has been correctly received by the slave node. The slave node has as explained above transmitted a return confirmation signal at the time t_2 . This has however not been received by the master node, and in consequence the master node has switched to transmit mode at the time t_3 and has transmitted a new signal. This retransmitted signal is - in the illustrated example - received by the slave node, which transmits a confirmation signal at the time t_4 . The confirmation signal is received by the master node, which in accordance with the invention is brought into sleep mode at the time t_5 . The slave node will as shown wait one receive slot, e.g. until the time t_6 before going into sleep mode. If the master node had not received the confirmation signal, it would have retransmitted the signal, and as the slave node is in receive mode in the respective time slot, it would have received the signal and would therefore not have been brought into sleep at the time t_6 , but would have switched to transmit mode in order to transmit a confirmation signal again. In this manner, i.e. when the slave node is controlled to wait at least one receive slot before going into sleep mode, it will normally be assured that both nodes are aware of the next polling time, before going into sleep mode.

[0068] It is obvious, though, that a maximum allowable number of time slots must be decided upon, e.g. corresponding to the above mentioned predetermined number of retransmittals.

[0069] In the above described cases at least one non-receipt of a signal has been involved, but it will be understood that if the signal from the master node in the first time slot after a sleep mode period is received by the slave node, and if the confirmation signal is received correctly by the master in the next time slot, then according to the invention the master will be brought into sleep mode e.g. at the time t_3 . The slave node may, as exemplified above, be brought into sleep mode immediately, after at least one further time slot, or at a point in time corresponding to a predetermined number of retransmittals. Other embodiments and details hereof will be possible, which will be obvious to a skilled person.

[0070] Even though precautions have been taken, as described above, to assure that both nodes involved in the above described time controlled poll mode method

and system will receive information regarding the next polling time, unusual circumstances etc. may result in a lapse of synchronicity.

[0071] For example, the slave may not receive information regarding the next polling time, irrespective of the retransmittals, because the predetermined number of retransmittals has been exceeded before the message have been received (correctly). In this case it will be recognized by the control means both at the master and the slave node that the synchronization has been lost, i.e. that a new polling time has not been arranged or agreed upon, since the master has not receive a confirmation from the slave and since the slave has not registered a message indicative of the next polling time.

[0072] In this case both nodes will change to another operational mode in order to establish a communication, whereby synchronization may be regained. For example, both nodes may switch to a long preamble mode.

[0073] This has been exemplified in fig. 5, which illustrates the functionality of a master and slave node in such an embodiment. At the time t_1 both nodes are operative after a sleep mode period and consecutive transmit and receive attempts are performed until the maximal predetermined number of slots have been reached at the time t_7 . Both the master and the slave, or rather the control means of these will have recognized the error-situation and will change the operating mode of both nodes to a long preamble mode. As shown, the master will transmit a signal having a long preamble, followed by a payload frame at the time t_9 . The long preamble allows prospective slaves to enter a receive mode in respective time slots. Thus, it is supposed that the slave node in question initiates a receive mode at the time t_8 . It will detect the transmitted preamble from the master node, indicating that a communication is requested with the respective slave node, and the slave node will consequently remain in receive mode until the payload, which comprises a message part indicative of the next polling time, has been received at the time t_{10} . In the time slot from t_{10} to the time t_{11} the slave node will transmit a confirmation signal to the master node, which has switched to a receive mode. If the master node receives the confirmation signal (correctly), it will be brought into sleep mode as indicated. The slave node may as explained previously enter sleep mode immediately, after at least one further time slot, for example at the time t_{12} , or after a period corresponding to the predetermined number of retransmittals. It will be understood that synchronization has now been re-established.

[0074] Another error-situation would occur if the slave node has received the next polling time, but the master node has not received a confirmation from the slave. This situation is illustrated in fig. 6. At the time t_1 both nodes are operative as described above after a sleep mode period and consecutive transmit and receive attempts are performed until the maximal predetermined number of slots have been reached at the time t_7 . Only the master, or rather the control means of the master

node will have recognized the error-situation and will change the operating mode to a long preamble mode. As shown, the master will transmit a signal having a long preamble, followed by a payload frame at the time t_9 . The slave node will however operate according to the time controlled poll mode and will enter the sleep mode, for example immediately after the time t_7 as illustrated. At the next polling time the slave node will enter receive mode, where it according to the time controlled poll mode will stay for the predetermined number of time slots, e.g. until the time t_{13} , since it has not received a message data frame from the master node. The slave node or rather the control means of this will now have recognized that synchronicity has been lost and will switch to a long preamble mode as indicated. In the illustrated example the slave will enter a receive mode at the time t_8 , it will detect the preamble transmitted from the master and will remain in receive mode until the payload has been received at the time t_{10} . The slave node will as explained above in connection with fig. 5 transmit a confirmation signal in a transmit mode from the time t_{10} to the time t_{11} , and if this is received by the master node, both nodes will enter sleep mode, the slave node possibly after a receive mode period (RX) as illustrated. It will be understood that the slave node may not necessarily enter communication with the master node during the first long preamble transmitted from the master node. In this case both nodes will remain in the long preamble mode until communication has been regained.

[0075] Further, it will be understood that the communication performed after the time t_{10} , e.g. after a communication has been established using the long preamble mode may include several time slots of consecutive transmit and receive slots as explained in connection with figs. 2 - 4, depending on whether the respective signals are received correctly or not.

[0076] It will be understood that a master node may communicate with more than one slave node, and that the master node comprises means for avoiding possible time collision, e.g. by selecting different polling time values for the respective slave nodes. Further, the master node may be able to select polling time values randomly e.g. by selecting polling times between e.g. 250 sec and 350 sec, while maintaining a mean poll time value of e.g. 300 sec. In this manner the likelihood of collision will be avoided in a system comprising more than one master node.

[0077] Further, it will be understood that even if the invention has been described above using nodes capable of performing two-way communication, the invention may be utilized by systems comprising nodes only able to perform one-way communication. A few examples of this shall be explained in the following.

[0078] A transmitter in a one-way system may operate according to a long preamble mode, e.g. by sending a message frame comprising a long preamble of length of e.g. 500 msec. This will of course incur power consumption on the part of the transmitter that is higher than the

power consumption in a corresponding two-way situation as described above. However, the message frame, e.g. the payload part of the frame will comprise data indicative of e.g. the next transmission time, thereby allowing the receiver to enter a sleep mode after having received the message. The receiver will as described above be controlled to be reactivated at or immediately before the transmission time indicated in the preceding message, thus allowing a substantial power saving to be achieved. Such a system will as a whole achieve a power saving that is greater than the power saving achieved by e.g. a similar system operation according to a long preamble mode.

[0079] If synchronicity should be lost in such a system, e.g. if the receiver does not receive the next message (correctly) and therefore has not received information concerning the next time of transmission, the receiver may enter operation according to a long preamble mode, e.g. by being active for a short duration, e.g. 10 msec, during a long preamble period, e.g. 500 msec. The receiver remains in this mode until a message has been received from the transmitter comprising an indication of the next time of transmission. The receiver may now operate according to the time control poll mode again, e.g. enter sleep mode and be reactivated at the next time of transmission.

[0080] Alternatively, when synchronicity has been lost, both the transmitter and the receiver may operate according to normal operating mode, until synchronicity as been regained, e.g. until the receiver has received information regarding the next scheduled time of transmission. The slave node will have a higher power consumption than when operating according to long preamble mode, but the transmitter - the master - will have a lower power consumption than when operating according to a long preamble mode, since it will not have to transmit a fairly long preamble. Further, it may be expected that synchronicity may be regained fairly quickly in this manner, whereby the time controlled poll mode may be re-entered rather quickly again after a loss of synchronicity.

[0081] Other optional operational schemes are possible when using the time control poll mode according to the invention in a one-way system, which will be obvious to a skilled person.

Claims

1. Method of controlling operation of at least one transmitter and/or one receiver in a communication system, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein a signal comprising a message frame transmitted from a transmitter to a receiver comprises a message part indicative of the time of transmission for a later signal.

2. Method according to claim 1, **characterized in that** said message part indicative of the time of transmission for a later signal, e.g. a later dataframe relates to the time of transmission for a following signal to be transmitted to said receiver.
3. Method according to claim 1 or 2, **characterized in that** said message part indicative of the time of transmission relates to a period of time following the signal in question.
4. Method according to claim 1 or 2, **characterized in that** said message part indicative of the time of transmission relates to a point of time relating to a timing reference, e.g. a timing reference established at each node or at least at one of the nodes involved.
5. Method according to one or more of claims 1 - 4, **characterized in that** said transmitter is brought into a special mode, e.g. a sleep mode, a power conserving mode, after having concluded transmission of said signal, preferably after receipt of a confirmation signal from said receiver.
6. Method according to claim 5, **characterized in that** said transmitter is controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part.
7. Method according to one or more of claims 1 - 6, **characterized in that** said receiver is brought into a special mode, e.g. a sleep mode, a power conserving mode, after having received said signal, preferably after having transmitted a confirmation signal and possibly after a further retransmission time.
8. Method according to claim 7, **characterized in that** said receiver is controlled to be brought into normal operating mode at - or before - the time of transmission indicated by said message part.
9. Method according to one or more of claims 1 - 8, **characterized in that** said method comprises steps of resuming synchronization, e.g. in case said receiver has not received said time indicative message part or in case said transmitter has not received confirmation from said receiver of receipt of said time indicative message part.
10. Method according to claim 9, **characterized in that** said steps of resuming synchronization comprises the step of altering the operating mode of the transmitter until a communication has been established with the receiver, where after normal operating mode may be resumed.
11. Method according to claim 9 or 10, **characterized in that** said steps of resuming synchronization comprises the step of altering the operating mode of the receiver until a communication has been established with the transmitter, where after normal operating mode may be resumed.
12. Method according to one or more of claims 1 - 11, **characterized in that** said special mode of said transmitter and/or said receiver comprises a sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively.
13. Method according to one or more of claims 1 - 12, **characterized in that** said at least one transmitter and/or at least one receiver each may form part of a node comprising a transceiver arrangement.
14. Method according to one or more of claims 1 - 13, **characterized in that** said communication system comprises at least two nodes, each comprising at least a transmitter and/or a receiver for wireless transmission, e.g. radio frequency transmission.
15. Communication system comprising at least one transmitter and one receiver, e.g. a system for transmission of control signals, request signals, interrogation signals etc. wherein said at least one transmitter is designed to be able to include a message part indicative of the time of transmission for a later signal when transmitting a signal to said at least one receiver.
16. Communication system according to claim 15, **characterized in that** said at least one transmitter and/or one receiver comprise timing means.
17. Communication system according to claim 15 or 16, **characterized in that** said at least one receiver comprises control means for switching between at least two modes of operation in dependence on a received message part indicative of the time of transmission for a later signal.
18. Communication system according to claim 15, 16 or 17, **characterized in that** said at least one transmitter comprises control means for switching between at least two modes of operation in dependence on a transmitted message part indicative of the time of transmission for a later signal.
19. Communication system according to claim 17 or 18, **characterized in that** said at least two modes of operation comprise a normal operating mode and a sleep mode, e.g. a power conserving mode.
20. Communication system according to claim 19,

characterized in that that said sleep mode, e.g. a power conserving mode of said transmitter and/or said receiver comprises sleep mode, e.g. a low power consumption mode of a radio frequency operating part, e.g. a radio frequency transmitter or a receiver, respectively. 5

21. Communication system according to one or more of claims 15 - 20, **characterized in that** said at least one transmitter and/or said at least one receiver comprises battery power supply means. 10
22. Communication system according to one or more of claims 15 - 21, **characterized in that** said at least one transmitter and/or said at least one receiver comprises means, e.g. control means for determining a lack of synchronicity and means for initiating a synchronization resumption process. 15
23. Communication system according to one or more of claims 15 - 22, **characterized in that** said system is designed to operate in accordance with a method according to one or more of claims 1 - 14. 20

-
24. Use of method according to one or more of claims 1 - 14 and/or system according to one or more of claims 15 - 23 for updating of measures values in e.g. control, request and/or interrogation systems. 25

30

35

40

45

50

55

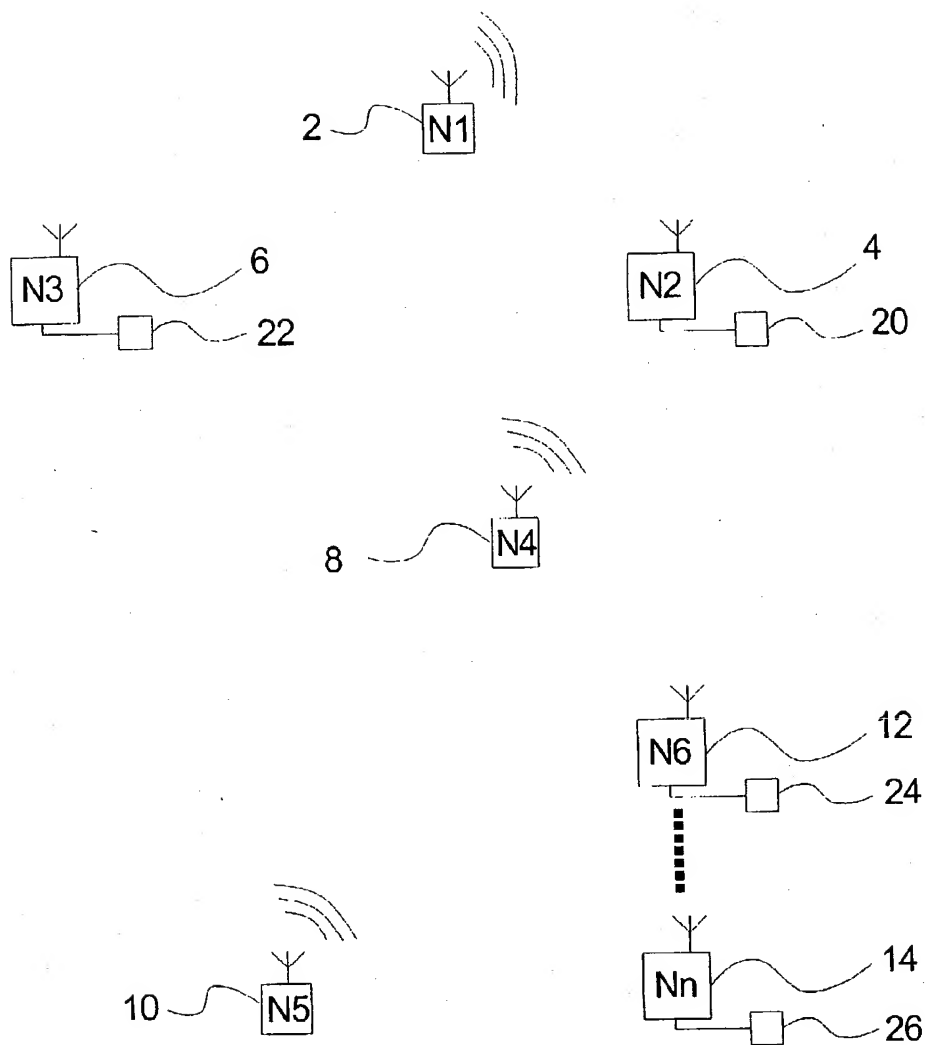
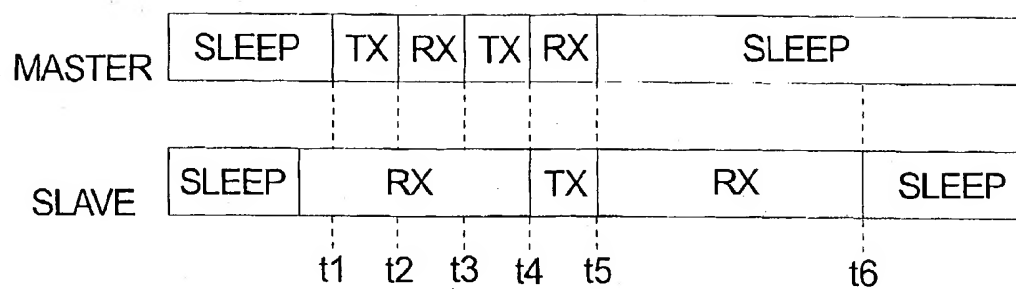
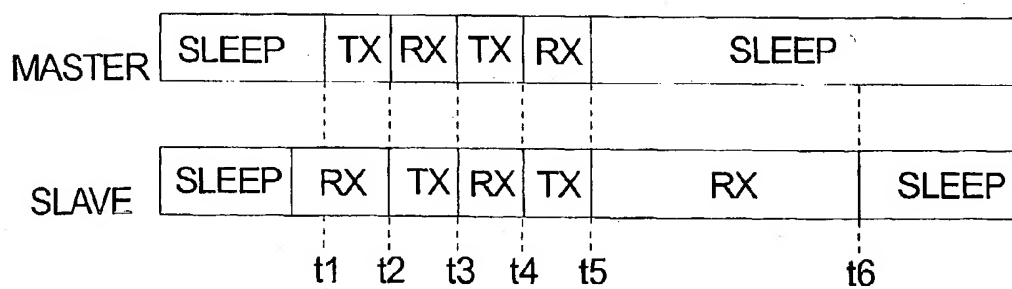
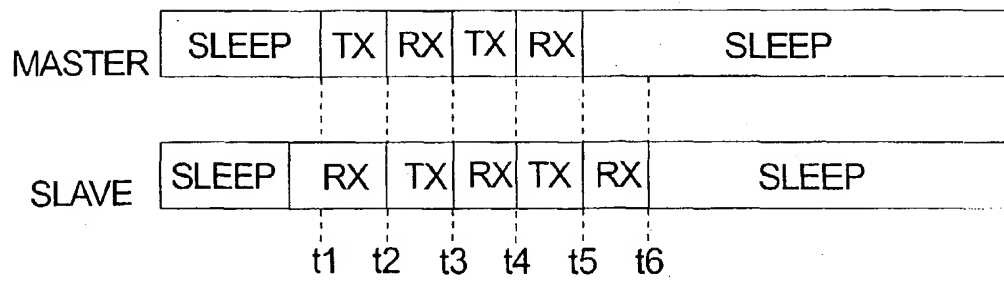


Fig. 1

*Fig. 2**Fig. 3*

*Fig. 4*

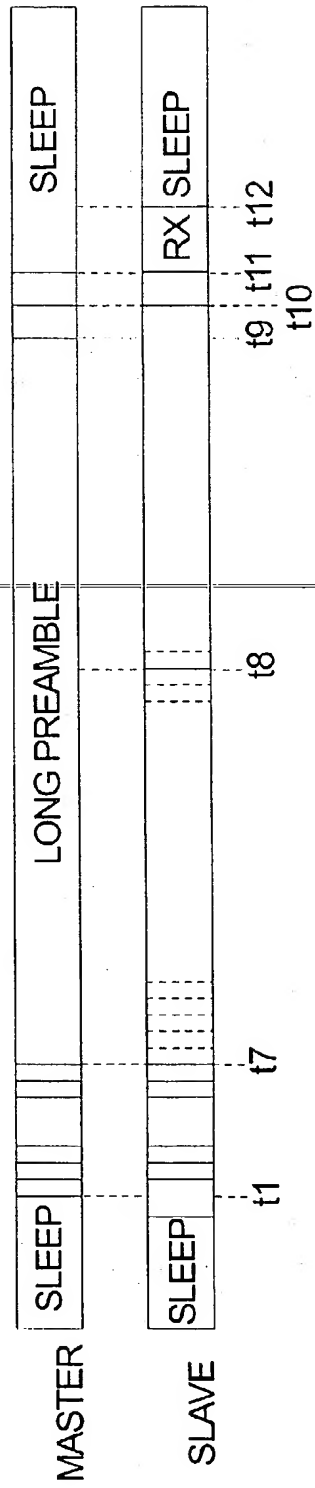


Fig. 5

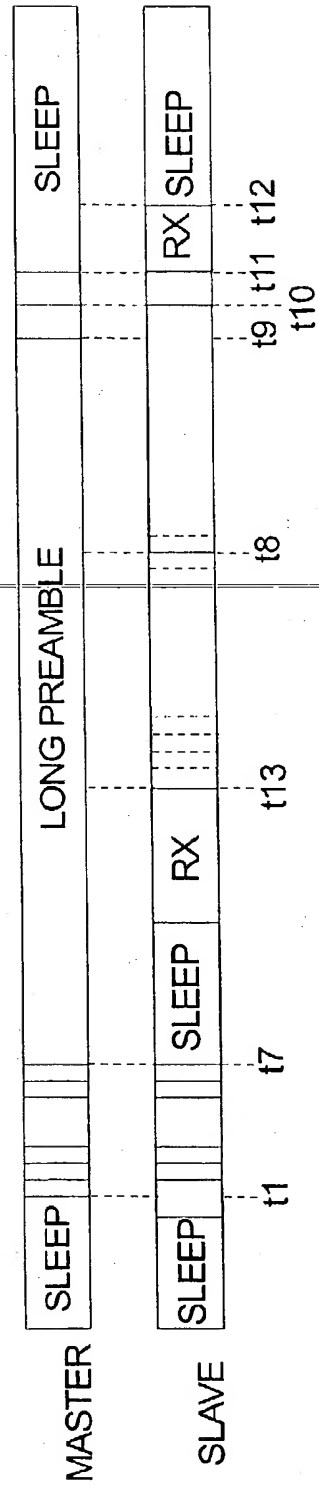


Fig. 6



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 07 9058

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 00 28776 A (BIENERT RENKE ;JAUSS FRITZ (DE); HONEYWELL AG (DE); KELLER MANFRED) 18 May 2000 (2000-05-18) * abstract; claims 1,2,4; figures 1,2 * * page 1, line 25 * * page 3, line 24 - line 32 * * page 4, line 26 - line 34 * ---	1-24	H04J3/06 H04L12/28 H04Q9/04 G08C17/00 H04L12/56
X	WO 99 46745 A (LEEuw EDO MARK ALEXANDER DE ;KONINKL KPN NV (NL); PIETERSE ROB (NL) 16 September 1999 (1999-09-16) * abstract; figure 4 * * page 5, line 42 - line 52 * * page 6, line 35 - line 54 * ---	1-8, 12-24	
X	EP 0 529 269 A (IBM) 3 March 1993 (1993-03-03) * abstract; claims 1,2,4,5,7,9,11,12 * * column 5, line 5 - line 8 * * column 5, line 48 - line 54 * * column 6, line 5 - line 30 * * column 6, line 42 - line 52 * ---	1-8, 12-24	
X	EP 0 748 085 A (GEN ELECTRIC) 11 December 1996 (1996-12-11) * abstract; claims 1-3,6-10 * * page 1, line 1 - line 13 * * page 2, line 22 - line 33 * * page 3, line 35 - line 37 * * page 4, line 6 - line 22 * ---	1-8, 12-24	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G01S G06F G08C G08G H04B H04J H04L H04Q
A	WO 02 47321 A (ERICSSON TELEFON AB L M ;GRAPATIN PER (SE); LINDSKOG JAN (SE); RYD) 13 June 2002 (2002-06-13) * abstract * ---	1-24	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 5 June 2003	Examiner Wolters, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons --- & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 07 9058

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	GB 2 086 106 A (MOTOROLA LTD) 6 May 1982 (1982-05-06) * abstract *	1-24	
A	WO 92 19059 A (SLW TELESYSTEMS INC) 29 October 1992 (1992-10-29) * abstract *	1-24	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 5 June 2003	Examiner Wolters. R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 07 9058

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-06-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0028776	A	18-05-2000	DE 19851959 A1	25-05-2000
			AU 1045700 A	29-05-2000
			CA 2337118 A1	18-05-2000
			WO 0028776 A1	18-05-2000
			EP 1129599 A1	05-09-2001

WO 9946745	A	16-09-1999	AU 747934 B2	30-05-2002
			AU 3049499 A	27-09-1999
			CA 2321531 A1	16-09-1999
			EP 1062831 A2	27-12-2000
			WO 9946745 A2	16-09-1999
			JP 2002507070 T	05-03-2002
			NL 1011505 C1	13-09-1999

EP 0529269	A	03-03-1993	US 5241542 A	31-08-1993
			DE 69228156 D1	25-02-1999
			DE 69228156 T2	05-08-1999
			EP 0529269 A2	03-03-1993
			JP 2047961 C	25-04-1996
			JP 5207020 A	13-08-1993
			JP 7083362 B	06-09-1995

EP 0748085	A	11-12-1996	US 5691980 A	25-11-1997
			CA 2176869 A1	08-12-1996
			EP 0748085 A1	11-12-1996
			IL 118285 A	22-12-1999
			JP 9171571 A	30-06-1997

WO 0247321	A	13-06-2002	AU 2962902 A	18-06-2002
			WO 0247321 A2	13-06-2002
			US 2002132603 A1	19-09-2002

GB 2086106	A	06-05-1982	MY 288 A	31-12-1988

WO 9219059	A	29-10-1992	CA 2040234 A1	12-10-1992
			WO 9219059 A1	29-10-1992
			DE 69220787 D1	14-08-1997
			DE 69220787 T2	27-11-1997
			EP 0580652 A1	02-02-1994
			US 5276680 A	04-01-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)